
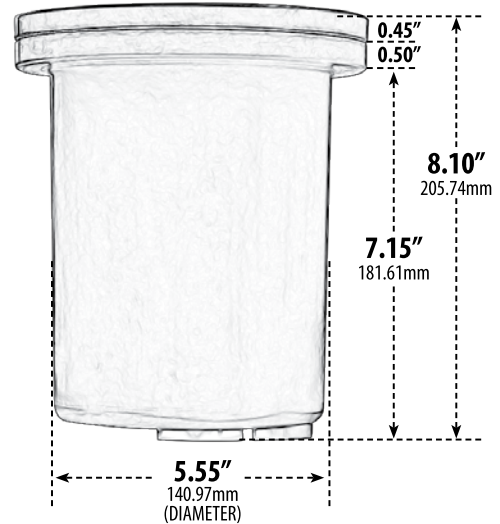


FG4450

IN-GROUND WELL LIGHT

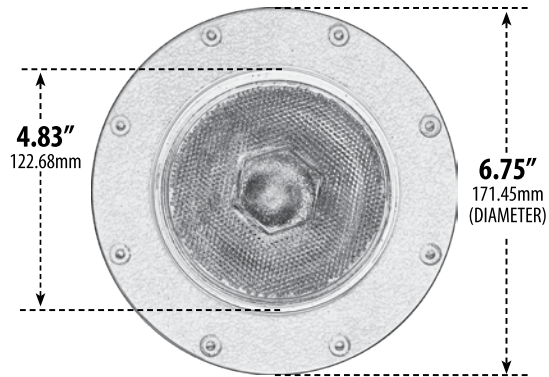


* Corrosion Resistant-Ocean Front Placement

- **Material:** Fiberglass or Brass (WBS)
- **Lens:** Clear, Heat Resistant, Tempered Glass

Model Number	Illuminant Type	Base Type	Wattage (W)	Volatage (V)	Color Temp.	Lamp(s) Included
FG4450	Incandescent	E26	150W (MAX)	120V	N/A	No
FG4450-L12-RGBW	LED	E26	12W	86V-265V	RGBW	Yes
FG4450-L15-RGBW	LED	E26	15W	120V	RGBW	Yes
FG4450-L25F-27K	LED	E26	25W	120V-277V	27K	Yes
FG4450-L25S-27K	LED	E26	25W	120V-277V	27K	Yes
FG4450-L25F-64K	LED	E26	25W	120V-277V	64K	Yes
FG4450-L25S-64K	LED	E26	25W	120V-277V	64K	Yes

- **Installation Type:** Rated for In-Ground Soil and Concrete Applications
- **Available Finish:** Bronze, *Weathered Brass (brass cover)*
- **RGBW Lamp Requires/Remote:** P-RMT-DL-MR16-LED-4W-MC (sold separately)
- **ETL Approved**

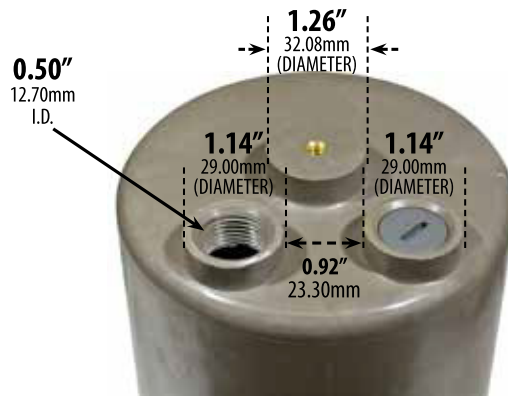

Overall Dimensions:
8.10"H x 6.75"W x 6.75"D

Weight: 3lbs 3oz
Weight w/Box: 3lbs 8.5oz
Box Dimensions:
9.19"H x 6.63"W x 6.75"D
Lamp Not Included (FG4450)

DABMAR
LIGHTING

DABMAR LIGHTING INCORPORATED

320 Graves Ave . Oxnard, CA 93030 . 805.604.9090 . f: 805.604.9050 . www.dabmar.com
4693 19th Street Ct E . Bradenton, FL 34203