
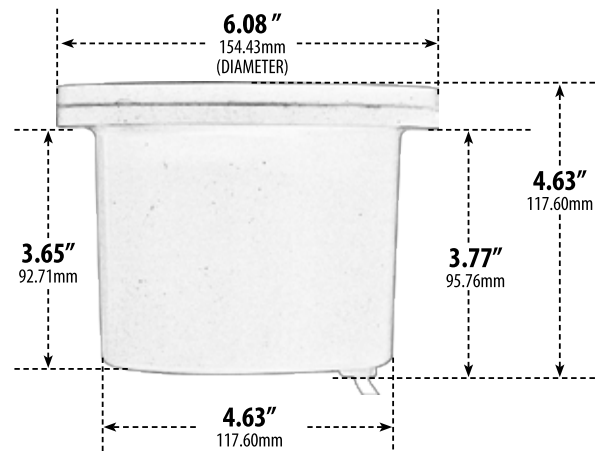


FG316

ADJUSTABLE IN-GROUND WELL LIGHT

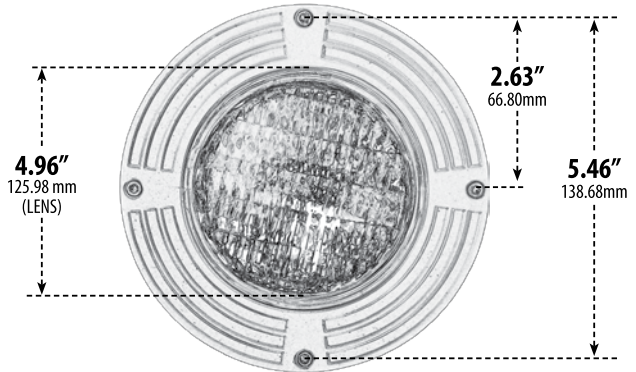

- **Material:** Fiberglass
- **Lens:** Clear, Heat Resistant, Tempered Glass
- **Lamp:** PAR36 (50W Maximum) Pre-wired with UL Listed Direct Burial Wire/Cable

Model Number	Illuminant Type	Base Type	Wattage (W)	Volatage (V)	Color Temp.	Lamp(s) Included
FG316	Incandescent	Screw	35W (MAX)	12V	N/A	No
FG316-L3-27K	LED	GU5.3	3W	12V	27K	Yes
FG316-L3-65K	LED	GU5.3	3W	12V	65K	Yes
FG316-L4-30K	LED	Screw	4W	12V	30K	Yes
FG316-L4-64K	LED	Screw	4W	12V	64K	Yes
FG316-L4-RGBW	LED	GU5.3	4W	12V	RGBW	Yes
FG316-L5-27K	LED	GU5.3	5W	12V	27K	Yes
FG316-L5-65K	LED	GU5.3	5W	12V	65K	Yes
FG316-L6-30K	LED	Screw	6W	12V	30K	Yes
FG316-L6-64K	LED	Screw	6W	12V	64K	Yes
FG316-L7-27K	LED	GU5.3	7W	12V	27K	Yes
FG316-L7-65K	LED	GU5.3	7W	12V	65K	Yes
FG316-L9-30K	LED	Screw	9W	12V	30K	Yes
FG316-L9-64K	LED	Screw	9W	12V	64K	Yes
FG316-L9-RGBW	LED	Screw	9W	12V	RGBW	Yes

*Corrosion Resistant-Ocean Front Placement

Overall Dimensions:
4.63"H x 6.08"W x 6.08 "D

Weight: 1.40 lbs
Approximate Wire Length: 15"
Box Dimensions:
5.43"H x 6.38"W x 6.38"D

- **Installation Type:** Rated for In-Ground Soil and Concrete Applications
- **Available Finish:** Bronze
- **RGBW Lamp Requires/Remote:** P-RMT-MR16-LED-4W-MC (sold separately)
- **ETL Approved**

DABMAR
LIGHTING

DABMAR LIGHTING INCORPORATED

320 Graves Ave . Oxnard, CA 93030 . 805.604.9090 . f: 805.604.9050 . www.dabmar.com

4693 19th Street Ct E . Bradenton, FL 34203