
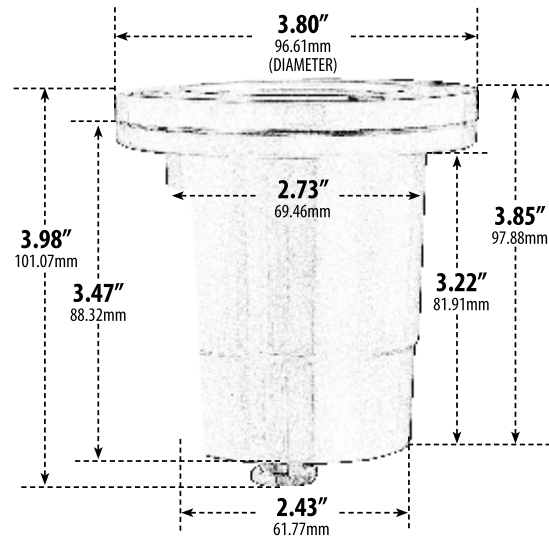


FG318

IN-GROUND WELL LIGHT

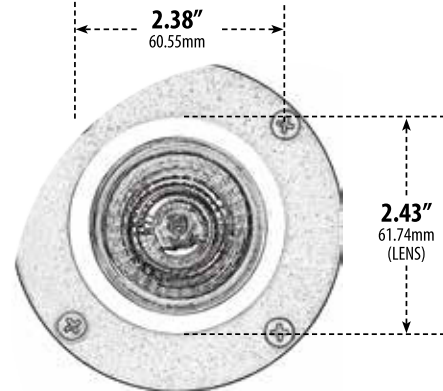

- **Material:** Fiberglass
- **Lens:** Clear, Heat Resistant, Tempered Glass
- **Lamp:** MR16 Bi-Pin Base (20W Maximum)

Model Number	Illuminant Type	Base Type	Wattage (W)	Voltage (V)	Color Temp.	Lamp(s) Included
FG318	Incandescent	GU5.3	20W (MAX)	12V	N/A	No
FG318-L3-27K	LED	GU5.3	3W	12V	27K	Yes
FG318-L3-65K	LED	GU5.3	3W	12V	65K	Yes
FG318-L4-RGBW	LED	GU5.3	4W	12V	RGBW	Yes
FG318-L5-27K	LED	GU5.3	5W	12V	27K	Yes
FG318-L5-65K	LED	GU5.3	5W	12V	65K	Yes
FG318-L7-27K	LED	GU5.3	7W	12V	27K	Yes
FG318-L7-65K	LED	GU5.3	7W	12V	65K	Yes

Pre-wired with UL Listed Direct Burial Wire/Cable

- **Installation Type:** Rated for In-Ground Soil and Concrete Applications
- **Available Finish:** Black, Bronze
- **RGBW Lamp Requires/Remote:** P-RMT-MR16-LED-4W-MC (sold separately)
- **ETL Approved**

Overall Dimensions:
4.08"H x 3.84"W x 3.84"D

Weight: 0.80 lbs
Approximate Wire Length: 16"
Box Dimensions:
6.00"H x 4.00"W x 4.00"D

DABMAR
LIGHTING

DABMAR LIGHTING INCORPORATED

320 Graves Ave . Oxnard, CA 93030 . 805.604.9090 . f: 805.604.9050 . www.dabmar.com
4693 19th Street Ct E . Bradenton, FL 34203