
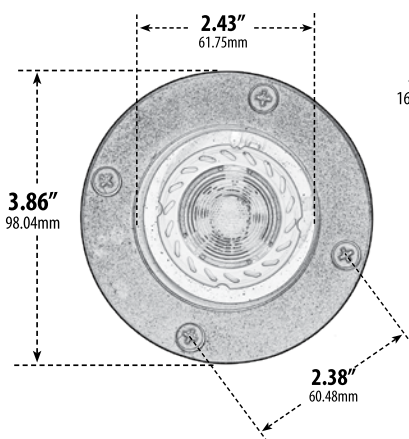
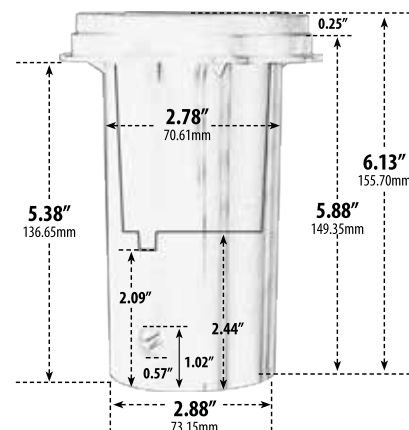


LV301

IN-GROUND WELL LIGHT

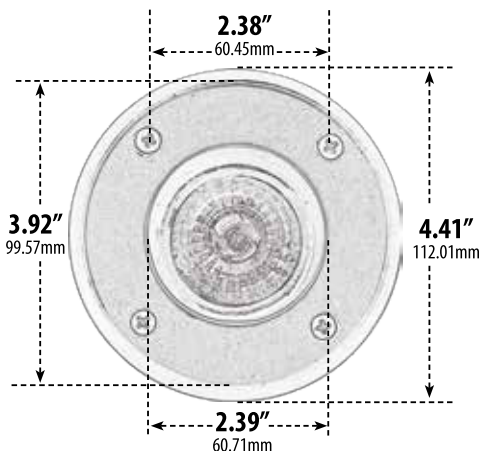

- **Material:** Powder Coated Cast Aluminum with PVC Sleeve
- **Lens:** Clear, Heat Resistant, Tempered Glass
- **Lamp:** MR16 Bi-Pin Base (50W Maximum)

Model Number	Illuminant Type	Base Type	Wattage (W)	Volatage (V)	Color Temp.	Lamp(s) Included
LV301	Incandescent	GU5.3	20W (MAX)	12V	N/A	No
LV301-L3-27K	LED	GU5.3	3W	12V	27K	Yes
LV301-L3-65K	LED	GU5.3	3W	12V	65K	Yes
LV301-L4-RGBW	LED	GU5.3	4W	12V	RGBW	Yes
LV301-L5-27K	LED	GU5.3	5W	12V	27K	Yes
LV301-L5-65K	LED	GU5.3	5W	12V	65K	Yes
LV301-L7-27K	LED	GU5.3	7W	12V	27K	Yes
LV301-L7-65K	LED	GU5.3	7W	12V	65K	Yes

Pre-wired with UL Listed Direct Burial Wire/Cable

- **Installation Type:** Rated for In-Ground Soil and Concrete Applications
- **Available Finish:** Black, Bronze, Green, Verde Green
- **ETL Approved**

Overall Dimensions of Bronze
4.58"H x 3.86"W x 3.86"D

Overall Dimensions:
6.13"H x 4.41"W x 4.41"D

Weight: 1.0 lbs
Approximate Wire Length: 22 "
Box Dimensions:
6.75"H x 4.75"W x 4.75"D

DABMAR
LIGHTING

DABMAR LIGHTING INCORPORATED

2140 Eastman Ave . Oxnard, CA 93030 . 805.604.9090 . f: 805.604.9050 . www.dabmar.com