
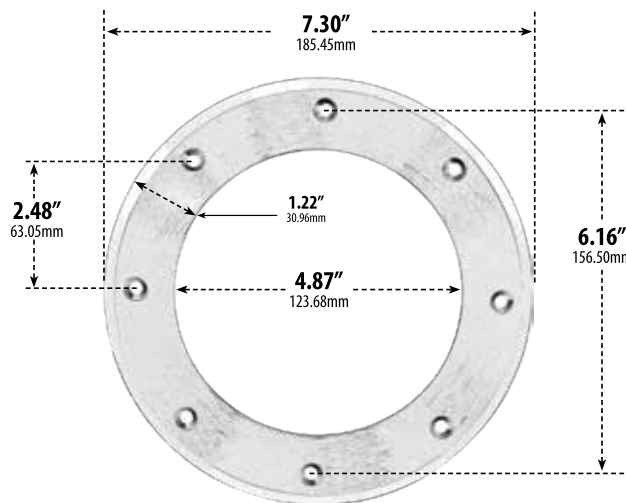


LV306

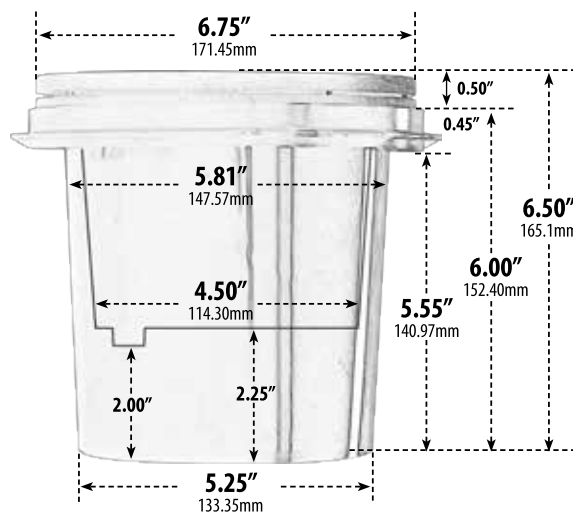

- ▶ **Material:** Powder Coated Cast Aluminum with PVC Sleeve
- ▶ **Lens:** Clear, Heat Resistant, Tempered Glass
- ▶ **Lamp:** PAR36 (50W Maximum)
- ▶ **Installation Type:** Rated for In-Ground Soil and Concrete Applications
- ▶ **Available Finish:** Black, Bronze, Green, Verde Green, *Stainless Steel 304*
- ▶ **RGBW Lamp Requires/Remote:** P-RMT-MR16-LED-4W-MC (sold separately)
- ▶ **ETL Approved**

Model Number	Illuminant Type	Base Type	Wattage (W)	Volatage (V)	Color Temp.	Lamp(s) Included
LV306	Incandescent	Screw	35W (MAX)	12V	N/A	No
LV306-L3-27K	LED	GU5.3	3W	12V	27K	Yes
LV306-L3-65K	LED	GU5.3	3W	12V	65K	Yes
LV306-L4-30K	LED	Screw	4W	12V	30K	Yes
LV306-L4-64K	LED	Screw	4W	12V	64K	Yes
LV306-L4-RGBW	LED	GU5.3	4W	12V	RGBW	Yes
LV306-L5-27K	LED	GU5.3	5W	12V	27K	Yes
LV306-L5-65K	LED	GU5.3	5W	12V	65K	Yes
LV306-L6-30K	LED	Screw	6W	12V	30K	Yes
LV306-L6-64K	LED	Screw	6W	12V	64K	Yes
LV306-L7-27K	LED	GU5.3	7W	12V	27K	Yes
LV306-L7-65K	LED	GU5.3	7W	12V	65K	Yes
LV306-L9-30K	LED	Screw	9W	12V	30K	Yes
LV306-L9-64K	LED	Screw	9W	12V	64K	Yes
LV306-L9-RGBW	LED	Screw	9W	12V	RGBW	Yes

Pre-wired with UL Listed Direct Burial Wire/Cable

Overall Dimensions: 6.50"H x 7.75"W x 7.75"D

Weight: 3.0 lbs

Approximate Wire Length: 16"

Box Dimensions: 7.00"H x 7.75"W x 7.75"D

Stainless Steel 304 Cover Specs

DABMAR
LIGHTING

DABMAR LIGHTING INCORPORATED

320 Graves Ave . Oxnard, CA 93030 . 805.604.9090 . f: 805.604.9050 . www.dabmar.com

4693 19th Street Ct E . Bradenton, FL 34203