

ARCHITECTURAL OUTDOOR BOLLARD

D110

WALKWAY · DRIVEWAY · ENTRANCE AREA BOLLARD

Architectural cage-top bollard

The D110 combines timeless architectural form with durable, low-maintenance construction. Its distinctive cage-top design provides comfortable light distribution while enhancing safety and defining walkways, driveways, and entrance areas.

42.00"
OVERALL HEIGHT

10.25"
MAX WIDTH


Fiberglass
BODY MATERIAL

Wet Location
UL APPROVED


Surface Mount
MOUNTING TYPE



BUILT FOR BEAUTIFUL SPACES



DISTINCTIVE CAGE-TOP DESIGN

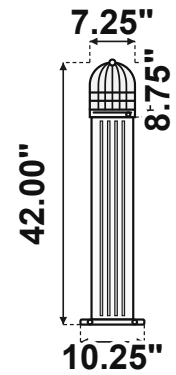

FRONT ELEVATION

Construction	Finishes	Electrical	Light sources	Installation	Listing
Fiberglass body with architectural fluting. Cage-top luminous head with frosted dome. White, heat-resistant polycarbonate lens.	Black (-B) Bronze (-BZ)	Available voltages: 120V-277V, 120V, 86V-265V. Integral LED driver on LED configurations. No-lamp E26 versions accept a medium-base lamp.	Lamp bases: E26, GU24, G24. LED lamps included on LED configurations. RGBW configuration uses a dedicated remote, sold separately.	Surface mount; mounting hardware included. Use supplied template and anchor pattern.	UL Approved for Wet Location

TYPICAL APPLICATIONS

Pedestrian Paths

Walkways

Driveways

Entrance Areas

Commercial Landscape

Residential

MODEL MATRIX AND SPECIFICATION DATA


Ordering / Configuration Matrix

Use the exact model number shown below when specifying or ordering.

Model number	Illuminant	Base	Wattage	Voltage	CCT	Lumens	Lamp
D110	Incandescent	E26	60W (MAX)	120V-277V	N/A	—	No
D110-L6-30K	LED	E26	6W	120V	30K	480	Yes
D110-L6-60K	LED	E26	6W	120V	60K	480	Yes
D110-L6-RGBW	LED	E26	6W	86V-265V	RGBW	550	Yes
D110-L9-27K	LED	GU24	9W	120V	27K	550	Yes
D110-L9-40K	LED	GU24	9W	120V	40K	800	Yes
D110-L12-30K	LED	G24	12W	120V-277V	30K	1200	Yes
D110-L12-40K	LED	G24	12W	120V-277V	40K	1225	Yes
D110-L12-50K	LED	G24	12W	120V-277V	50K	1250	Yes
D110-L20-30K	LED	G24	20W	120V-277V	30K	2400	Yes
D110-L20-50K	LED	G24	20W	120V-277V	50K	2400	Yes

Lumens shown are nominal lamp output values provided for the listed D110 configurations.

Finish suffix. Add -B for Black or -BZ for Bronze to complete the model number.
Example complete SKU: D110-L20-50K-B = 20W LED / 5000K / Black



Physical

Overall dimensions	10.25" W × 42.00" H × 10.25" D
Maximum height	42.00"
Width	10.25"
Maximum depth	10.25"

Material / Listing

Body material	Fiberglass
Lens	White, Heat Resistant Polycarbonate
Available finishes	Black, Bronze
Listing	UL Approved for Wet Location
Mounting	Surface Mount
Hardware included	Yes

Optical / Application notes

- Decorative open-cage luminous form.
- Confirm glare/uplight suitability for dark-sky-sensitive projects.
- Consult Projekt Supply for lamp-specific performance/IES data.

RGBW remote control

D110-L6-RGBW · remote sold separately




4-ZONE
P-RMT-MR16-LED-4W-MC
~100 ft / 30 m



8-ZONE
P-RMT-LED-8ZONE-MC
~100 ft / 30 m

2.4 GHz RF

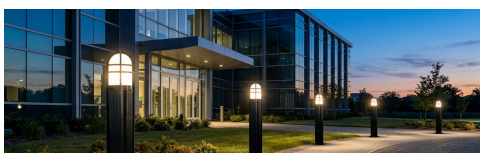


MOUNTING AND INSTALLATION DIMENSIONS


Mounting / Installation Details

Dimensions shown in inches; metric equivalents shown where supplied by manufacturer.


BASE PATTERN

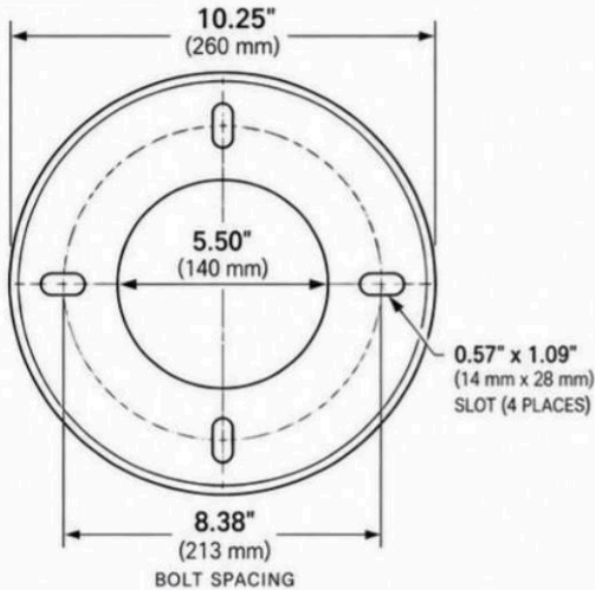

TEMPLATE PATTERN

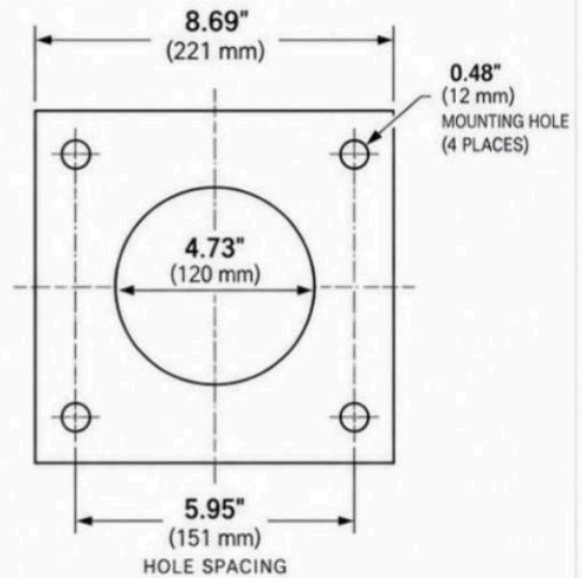

ANCHOR BOLT

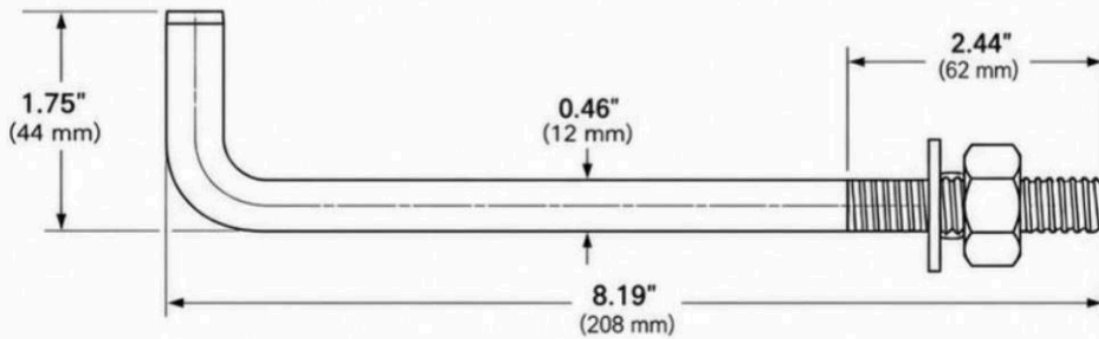

Installation notes

- Surface mount; mounting hardware included.
- Use supplied template and anchor pattern shown above.
- Field wiring and anchorage to comply with local code.
- Verify substrate and site conditions before installation.

Warranty

Fiberglass: 3 years from date of shipment.
LED: refer to current manufacturer lamp warranty and performance data.

Manufacturer

Dabmar Lighting Incorporated
320 Graves Ave · Oxnard, CA 93030
805.604.9090 · f: 805.604.9050
www.dabmar.com
4693 19th Street Ct E, Bradenton, FL 34203