

ARCHITECTURAL OUTDOOR BOLLARD

D3300

WALKWAY · DRIVEWAY · ENTRANCE AREA BOLLARD

Architectural cast-aluminum bollard

The D3300 is an architectural outdoor bollard built for walkways, driveways, and entrance areas. Cast Aluminum construction and a luminous head provide comfortable path lighting with low-maintenance service.

43.25"
OVERALL HEIGHT

6.69"
MAX WIDTH

Cast Aluminum
BODY MATERIAL

Wet Location
UL APPROVED


Surface Mount
MOUNTING TYPE



BUILT FOR BEAUTIFUL SPACES



FIXTURE DETAIL

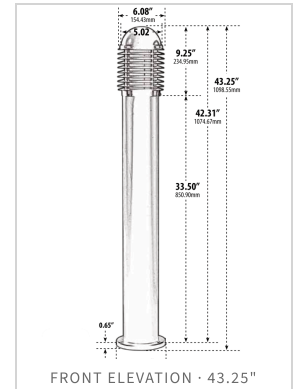

Construction	Finishes	Electrical	Light sources	Installation	Listing
Cast Aluminum body. Luminous head with heat-resistant polycarbonate lens.	- Black (-B) - Bronze (-BZ) - Verde Green (-VG)	Available voltages: 120V-277V, 120V, 86V-265V. Integral LED driver on LED configurations. No-lamp versions accept the listed lamp base.	Lamp bases: G24, E26, GU24. LED source included on LED configurations. RGBW configuration uses a dedicated remote, sold separately.	Surface mount. Use the manufacturer template and anchor pattern shown.	UL Approved for Wet Location

TYPICAL APPLICATIONS

Pedestrian Paths

Walkways

Driveways

Entrance Areas

Commercial Landscape

Residential

MODEL MATRIX AND SPECIFICATION DATA

Ordering / Configuration Matrix

Use the exact model number shown below when specifying or ordering.

Model number	Illuminant	Base	Wattage	Voltage	CCT	Lumens	Lamp
D3300	Incandescent	E26	60W (MAX)	120V-277V	N/A	—	No
D3300-L6-30K	LED	E26	6W	120V	30K	480	Yes
D3300-L6-60K	LED	E26	6W	120V	60K	480	Yes
D3300-L6-RGBW	LED	E26	6W	86V-265V	RGBW	550	Yes
D3300-L9-27K	LED	GU24	9W	120V	27K	550	Yes
D3300-L9-40K	LED	GU24	9W	120V	40K	800	Yes
D3300-L12-30K	LED	G24	12W	120V-277V	30K	1200	Yes
D3300-L12-40K	LED	G24	12W	120V-277V	40K	1225	Yes
D3300-L12-50K	LED	G24	12W	120V-277V	50K	1250	Yes
D3300-L20-30K	LED	G24	20W	120V-277V	30K	2400	Yes
D3300-L20-50K	LED	G24	20W	120V-277V	50K	2400	Yes

Lumens shown are nominal lamp output values provided for the listed D3300 configurations.

Finish suffix. Add -B for Black or -BZ for Bronze or -VG for Verde Green to complete the model number.

Example complete SKU: D3300-L20-50K-B = 20W / 50K / Black



Physical

Overall dimensions	6.69" W × 43.25" H × 6.69" D
Maximum height	43.25"
Width	6.69"
Maximum depth	6.69"

Material / Listing

Body material	Cast Aluminum
Available finishes	Black, Bronze, Verde Green
Listing	UL Approved for Wet Location
Mounting	Surface Mount

Optical / Application notes

- Confirm glare/uplight suitability for dark-sky-sensitive projects.
- Consult Projekt Supply for lamp-specific performance/IES data.

RGBW remote control

D3300 RGBW - remote sold separately



4-ZONE

P-RMT-MR16-LED-4W-MC
~100 ft / 30 m



8-ZONE

P-RMT-LED-8ZONE-MC
~100 ft / 30 m


2.4 GHz RF




MOUNTING AND INSTALLATION DIMENSIONS

Mounting / Installation Details

Dimensions shown in inches; metric equivalents shown where supplied by manufacturer.

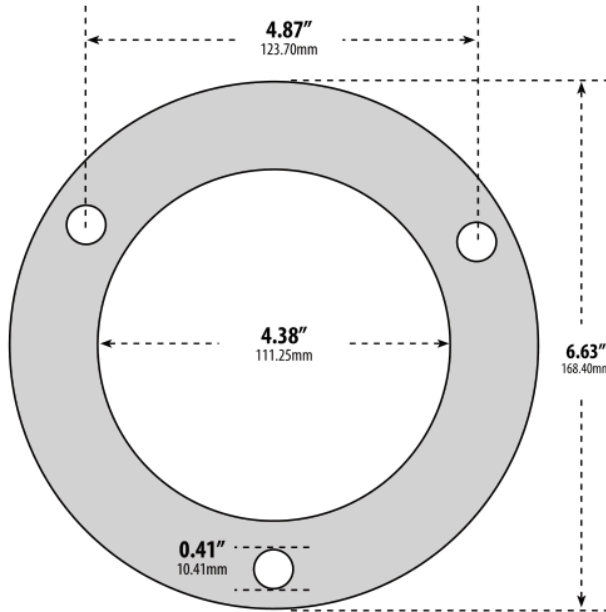

BASE PATTERN

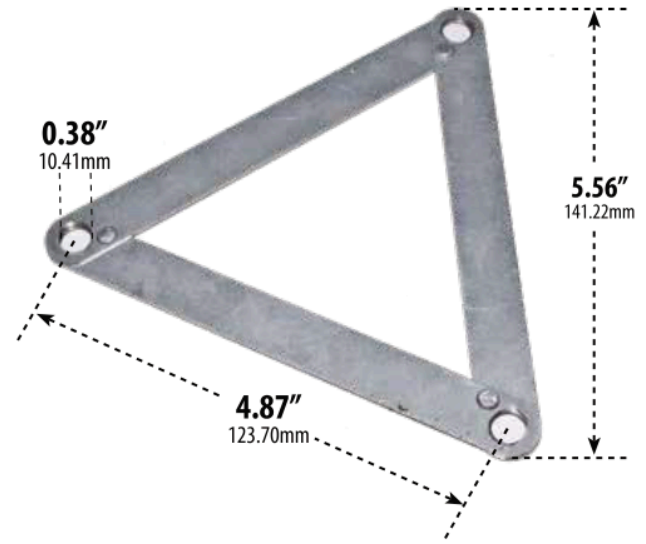

TEMPLATE PATTERN

BOLT

5/8" NUT



Installation notes

- Surface mount.
- Use the manufacturer template and anchor pattern shown.
- Confirm mounting hardware with the current manufacturer kit.
- Field wiring and anchorage to comply with local code.
- Verify substrate and site conditions before installation.

Warranty

Cast Aluminum: 3 years from date of shipment.
LED: refer to current manufacturer lamp warranty and performance data.

Manufacturer

Dabmar Lighting Incorporated
320 Graves Ave · Oxnard, CA 93030
805.604.9090 · f: 805.604.9050
www.dabmar.com
4693 19th Street Ct E, Bradenton, FL 34203