

ARCHITECTURAL OUTDOOR BOLLARD

D480

WALKWAY · DRIVEWAY · ENTRANCE AREA BOLLARD

Architectural cast-aluminum bollard

The D480 is an architectural outdoor bollard built for walkways, driveways, and entrance areas. Cast Aluminum construction and a luminous head provide comfortable path lighting with low-maintenance service.


40.25" OVERALL HEIGHT	15.50" MAX WIDTH	Cast Aluminum BODY MATERIAL	Wet Location UL APPROVED	Surface Mount MOUNTING TYPE
---------------------------------	----------------------------	---------------------------------------	------------------------------------	---------------------------------------



BUILT FOR BEAUTIFUL SPACES



FIXTURE DETAIL

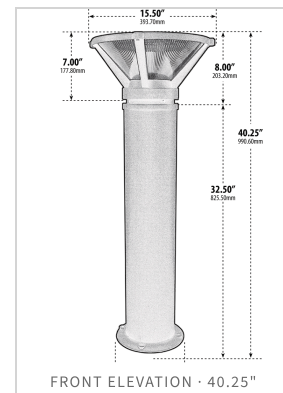

FRONT ELEVATION · 40.25"

Construction	Finishes	Electrical	Light sources	Installation	Listing
Cast Aluminum body. Luminous head with heat-resistant polycarbonate lens.	Black (-B) Bronze (-BZ) Verde Green (-VG)	Available voltages: 120V-277V, 120V, 86V-265V. Integral LED driver on LED configurations. No-lamp versions accept the listed lamp base.	Lamp bases: G24, E26, GU24. LED source included on LED configurations. RGBW configuration uses a dedicated remote, sold separately.	Surface mount. Use the manufacturer template and anchor pattern shown.	UL Approved for Wet Location

TYPICAL APPLICATIONS

- Pedestrian Paths
- Walkways
- Driveways
- Entrance Areas
- Commercial Landscape
- Residential

MODEL MATRIX AND SPECIFICATION DATA

Ordering / Configuration Matrix

Use the exact model number shown below when specifying or ordering.

Model number	Illuminant	Base	Wattage	Voltage	CCT	Lumens	Lamp
D480	Incandescent	E26	60W (MAX)	120V-277V	N/A	—	No
D480-L6-30K	LED	E26	6W	120V	30K	480	Yes
D480-L6-60K	LED	E26	6W	120V	60K	480	Yes
D480-L6-RGBW	LED	E26	6W	86V-265V	RGBW	550	Yes
D480-L9-27K	LED	GU24	9W	120V	27K	550	Yes
D480-L9-40K	LED	GU24	9W	120V	40K	800	Yes
D480-L12-30K	LED	G24	12W	120V-277V	30K	1200	Yes
D480-L12-40K	LED	G24	12W	120V-277V	40K	1225	Yes
D480-L12-50K	LED	G24	12W	120V-277V	50K	1250	Yes
D480-L20-30K	LED	G24	20W	120V-277V	30K	2400	Yes
D480-L20-50K	LED	G24	20W	120V-277V	50K	2400	Yes

Lumens shown are nominal lamp output values provided for the listed D480 configurations.

Finish suffix. Add -B for Black or -BZ for Bronze or -VG for Verde Green to complete the model number.

Example complete SKU: D480-L20-50K-B = 20W / 50K / Black



Physical

Overall dimensions	15.50" W × 40.25" H × 15.50" D
Maximum height	40.25"
Width	15.50"
Maximum depth	15.50"

Material / Listing

Body material	Cast Aluminum
Available finishes	Black, Bronze, Verde Green
Listing	UL Approved for Wet Location
Mounting	Surface Mount

Optical / Application notes

- Confirm glare/uplight suitability for dark-sky-sensitive projects.
- Consult Projekt Supply for lamp-specific performance/IES data.

RGBW remote control

D480 RGBW · remote sold separately



4-ZONE

P-RMT-MR16-LED-4W-MC
~100 ft / 30 m



8-ZONE

P-RMT-LED-8ZONE-MC
~100 ft / 30 m


2.4 GHz RF




MOUNTING AND INSTALLATION DIMENSIONS

Mounting / Installation Details

Dimensions shown in inches; metric equivalents shown where supplied by manufacturer.

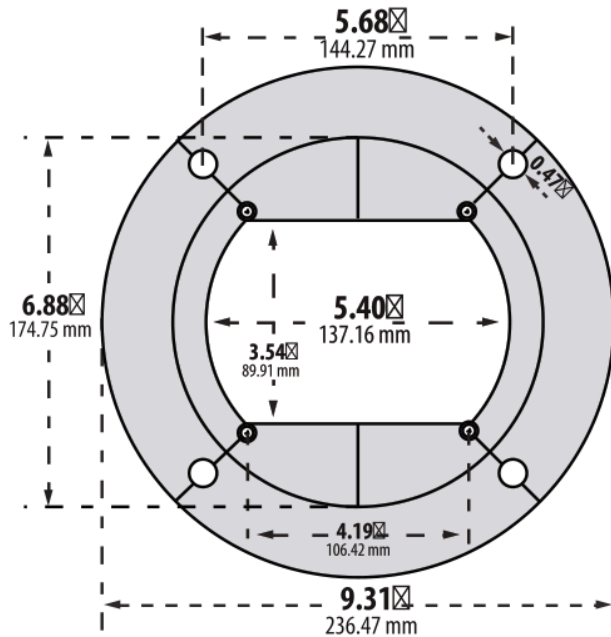


BASE PATTERN

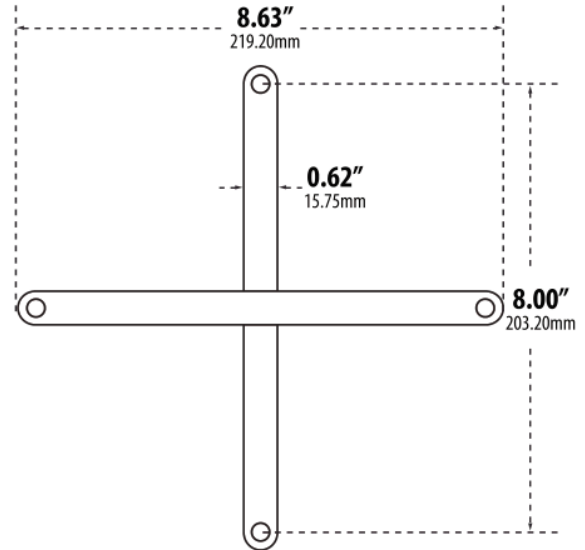

TEMPLATE PATTERN

BOLT

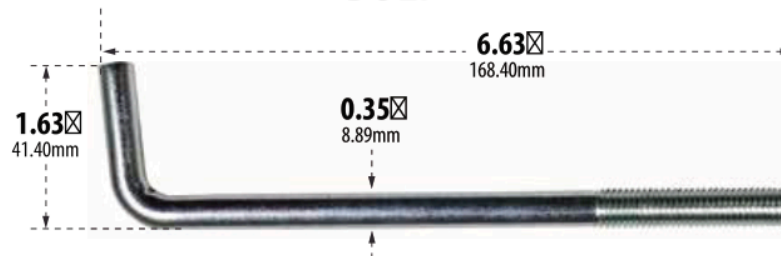

Installation notes

- Surface mount.
- Use the manufacturer template and anchor pattern shown.
- Confirm mounting hardware with the current manufacturer kit.
- Field wiring and anchorage to comply with local code.
- Verify substrate and site conditions before installation.

Warranty

Cast Aluminum: 3 years from date of shipment.
LED: refer to current manufacturer lamp warranty and performance data.

Manufacturer

Dabmar Lighting Incorporated
320 Graves Ave · Oxnard, CA 93030
805.604.9090 · f: 805.604.9050
www.dabmar.com
4693 19th Street Ct E, Bradenton, FL 34203