

ARCHITECTURAL OUTDOOR BOLLARD

D810-LB20-40K

WALKWAY · DRIVEWAY · ENTRANCE AREA BOLLARD

Integral-LED architectural bollard

The D810-LB20-40K is an architectural outdoor bollard built for walkways, driveways, and entrance areas. Cast Aluminum construction and a luminous head provide comfortable path lighting with low-maintenance service.


39.96" OVERALL HEIGHT	6.30" MAX WIDTH	Cast Aluminum BODY MATERIAL	Wet Location UL APPROVED	Surface Mount MOUNTING TYPE
---------------------------------	---------------------------	---------------------------------------	------------------------------------	---------------------------------------



BUILT FOR BEAUTIFUL SPACES



FIXTURE DETAIL

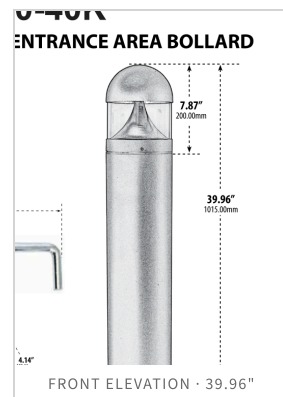

Construction	Finishes	Electrical	Light sources	Installation	Listing
Cast Aluminum body. Integral LED board; lamp is not field-replaceable. Heat-resistant polycarbonate lens/diffuser.	Verde Green (-VG) Black (-B) Bronze (-BZ)	Available voltages: 120V-277V. Integral LED driver on LED configurations. Integral LED board; no screw-in lamp.	Lamp bases: LED Board. LED source included on LED configurations.	Surface mount. Use the manufacturer template and anchor pattern shown.	UL Approved for Wet Location

TYPICAL APPLICATIONS

Pedestrian Paths

Walkways

Driveways

Entrance Areas

Commercial Landscape

Residential

MODEL MATRIX AND SPECIFICATION DATA


Ordering / Configuration Matrix

Use the exact model number shown below when specifying or ordering.

Model number	Illuminant	Base	Wattage	Voltage	CCT	Lumens	Lamp
D810-LB20-40K	LED	LED Board	20W	120V-277V	40K	1107	Yes

Lumens shown are manufacturer fixture values for D810-LB20-40K where verified.

Finish suffix. Add -VG for Verde Green or -B for Black or -BZ for Bronze to complete the model number.
Example complete SKU: D810-LB20-40K-B = 20W / 40K / Black



Physical

Overall dimensions	6.30" W × 39.96" H × 6.30" D
Maximum height	39.96"
Width	6.30"
Maximum depth	6.30"

Material / Listing

Body material	Cast Aluminum
Available finishes	Verde Green, Black, Bronze
Listing	UL Approved for Wet Location
Mounting	Surface Mount

Optical / Application notes

- Confirm glare/uplight suitability for dark-sky-sensitive projects.
- Consult Projekt Supply for lamp-specific performance/IES data.



COMMERCIAL CAMPUS



HOSPITALITY ENTRY





RESIDENTIAL WALKWAY

MOUNTING AND INSTALLATION DIMENSIONS

Mounting / Installation Details

Dimensions shown in inches; metric equivalents shown where supplied by manufacturer.

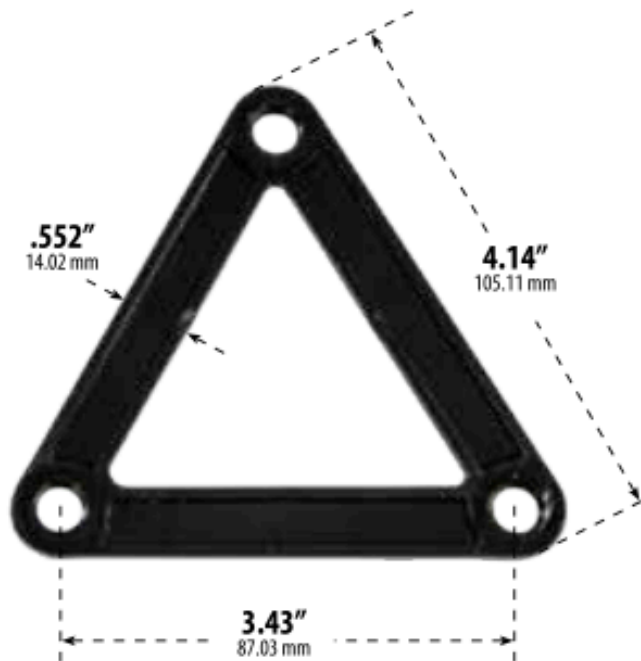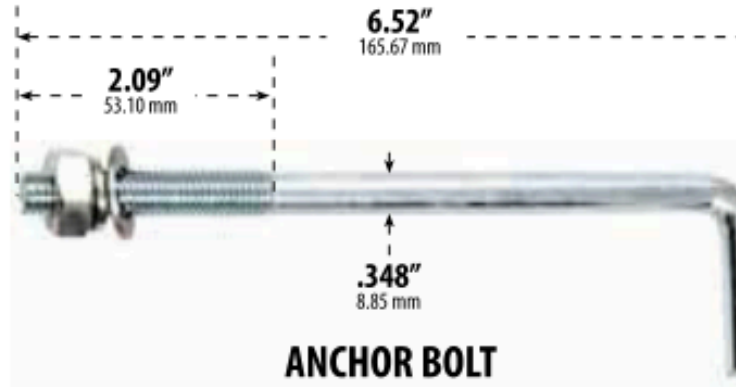

Installation notes

- Surface mount.
- Use the manufacturer template and anchor pattern shown.
- Confirm mounting hardware with the current manufacturer kit.
- Field wiring and anchorage to comply with local code.
- Verify substrate and site conditions before installation.

Warranty

Cast Aluminum: 3 years from date of shipment.
LED: refer to current manufacturer lamp warranty and performance data.

Manufacturer

Dabmar Lighting Incorporated
320 Graves Ave · Oxnard, CA 93030
805.604.9090 · f: 805.604.9050
www.dabmar.com
4693 19th Street Ct E, Bradenton, FL 34203